


XTREME E-Z LOADER™

SPECIFICATIONS	EZ18	
Bed capacity	17,000 lbs	7,700kg
Dove tail lift capacity	10,000 lbs	4,535kg
Tow capacity	5,000 lbs	2,267kg
Approximate G.V.W.	36,000 lbs	16,500kg
Hydraulic P.T.O. (flow per min)	14 gal	53L
Overall bed (W x L)	8' 2" x 25' 3"	2.49m x 7.69m
Main bed (W x L)	8' 2" x 17'	2.49m x 5.18m
Dove tail (W x L)	8' 2" x 8'	2.49m x 2.43m
Flip tail (W x L)	8' 2" x 5' 3"	2.49m x 1.60m
Bulk head height	60"	1.52m
Cab to axle length	191"	4.85m
Ramp length	13' 4"	4.06m
Bed height	48"	1.20m
Max dock height	66"	1.67m
Ramp angle / %	18° / 32%	
Hitch receiver tube	2"	50.8mm
Wood thickness	1"	25.4mm
Minimum chassis frame rail height	39"	0.985m

STANDARD FEATURES

- Bulkhead bolted to the frame
- Traction plate full ramp
- Knife edge ramp
- Chain tie-downs (every 350 - 550mm")
- Dock loading ability
- Positive tail lock (non hydraulic)

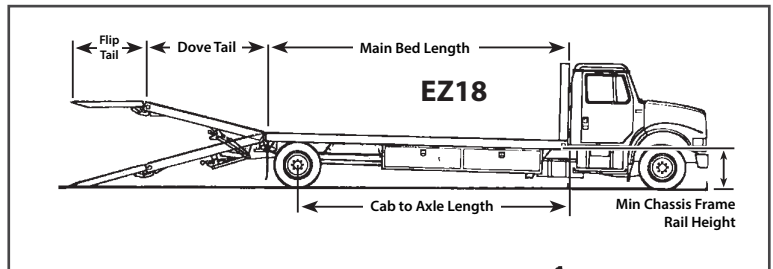

Dimensions may change depending on truck manufacturer and model. EZ24 cab to axle measurement is to center of tandem. Bed dimensions may vary on chassis equipped with vertical stacks. Chassis equipped with aluminum outer wheels require inner steel wheels.

