MHP13/35

TRAILER MOUNTED BOOM LIFTS



- Safe and stable working height of up to 12.6m
- Heavy duty trailer mounted articulated boom lift
- Robust steel platform with two man capacity
- Easy to use outrigger/boom safety interlocks
- Ideal for a wide range of applications



TRAILER MOUNTED BOOM LIFTS

MHP13/35


DIMENSIONS	MHP13/35
Max.height	12.6m
Max. platform height (A)	10.6m
Horizontal outreach	5.6m at 6m
Platform size	1.25m x 0.78m 1.07m
Outrigger footprint	3.7m x 3.9m
Overall width (outriggers extended)	3.95m
Overall width (outriggers retracted) (B)	1.58m
Overall length (C)	5.99m
Transport length (D)	2.05m


PERFORMANCE	
Platform capacity (with rotator)	227kg
Max. wind speed	12.5m/s
Levelling	auto
Turntable rotation	540° non-continuous
Tyres	185 R14
Brakes	Hydraulic disc
Max. axle capacity	1,750kg
Trailer tongue weight	65kg

POWER	
Power source	Honda petrol engine 5.5hp
Hydraulic system	Proportional electro/hydraulic

WEIGHT	
Gross weight	1 360kg

WORKING ENVELOPE

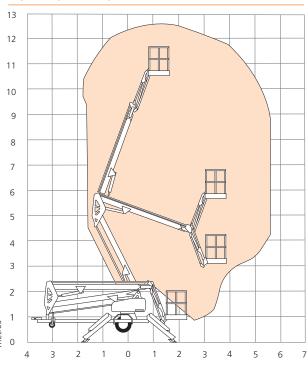



STANDARD FEATURES

- High strength steel boom and base construction
- Proportional speed control
- Heavy duty tow coupling
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable petrol engine
- Versatile jib boom (+70° to -70°)
- Articuating boom sections for 'up & over' reach
- 600V AC rated cable to platform
- Two man steel platform
- Automatic self-levelling stabilisers
- Outrigger/boom safety interlocks
- Lockable hinged covers
- Hour meter
- Lifting lugs
- Rotating basket mount
- Platform rotator
- Spare wheel

OPTIONS

- Flashing light
- 110/240V GFCI power to platform
- Diesel and bi/energy options

Ssnorkel

Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales@snorkellifts.com