
# S3215E/S3219E ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & nimble
- Drives through a standard doorway
- Suitable for indoor and outdoor use
- Easy to use & maintain

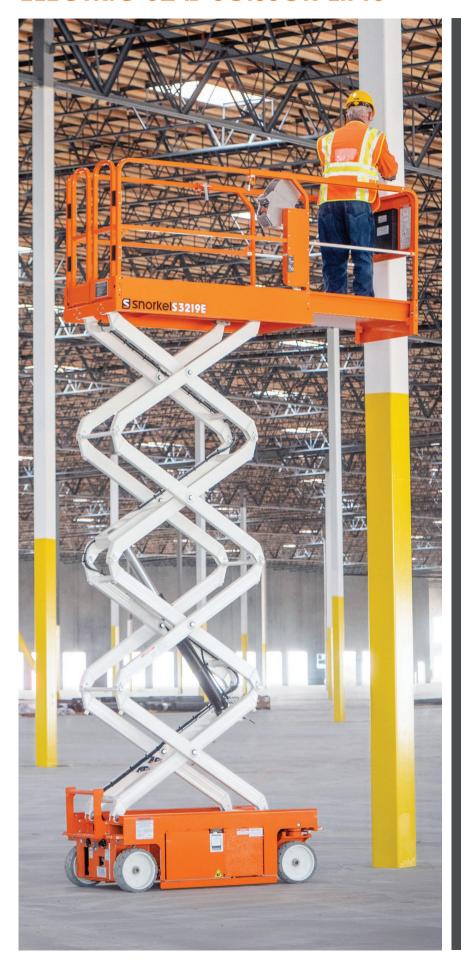

## ELECTRIC SLAB SCISSOR LIFTS

### S3215E/S3219E


DIMENSIONS	\$3215E	\$3219E
Max. working height	6.6m	7.79m
Max. platform height ( <b>A</b> )	4.6m	5.79m
Platform size (stowed)	0.72m x 1.62m	0.72m x 1.62m
Platform size (extended)	0.72m x 2.53m	0.72m x 2.53m
Extension deck length	0.91m	0.91m
Overall length (with step) ( <b>C</b> )	1.78m	1.78m
Overall length (without step)	1.73m	1.73m
Overall width ( <b>D</b> )	0.81m	0.81m
Stowed height ( <b>B</b> )	2.02m	1965mm
Min. height (guardrails folded)	1.59m	1.65m
Ground clearance (stowed)	66mm	66mm
Ground clearance (elevated)	19mm	19mm


PERFORMANCE			
Platform capacity (SWL)	272kg	250kg	
Max. drive height	4.6m	5.79m	
Max. wind speed	12.5m/s	12.5m/s	
Max. drive speed (stowed)	3.2km/h	3.2km/h	
Max. drive speed (elevated)	0.6km/h	0.6km/h	
Raise/lower time	20/36 sec	20/38 sec	
Gradeability	25%	25%	
Inside turning radius	0.1m	0.1m	
Outside turning radius	1.63m	1.63m	
Tires	12 x 4 non-marking rubber		
Controls	proportional		
Drive system	2 wheel drive		

POWER	
Power source	24V DC battery electric
Charger	90 - 240V, 25amp

WEIGHT		
Weight	1,227kg	1,614kg

#### **TURNING RADIUS**





### STANDARD FEATURES

- Roll-out deck extension with dual locks
- Non-marking tyres
- Loading control pendant
- Swing-out service trays
- Saloon-door style entry gates
- Descent alarm
- All motion alarm
- 2 persons indoor
- 1 person outdoor
- Proportional controls, including descent
- Power line to platform
- Hour meter & onboard diagnostics display
- Integrated battery charger
- Battery condition indicator
- Crane & forklift points
- Dual lanyard attachments points
- Flashing amber light
- Scissor stack roller slide plates (set of 2)
- 2 year parts & labour, 5 year structural warranty
- CE approved

### **OPTIONS**

- Special paint colours
- Snorkel Guard™ secondary guarding system
- Environmental hydraulic oil
- Airline to platform
- Aircraft bumpquard package
- Panel carrier
- Pipe rack
- Top rail



Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales.emea@snorkellifts.com